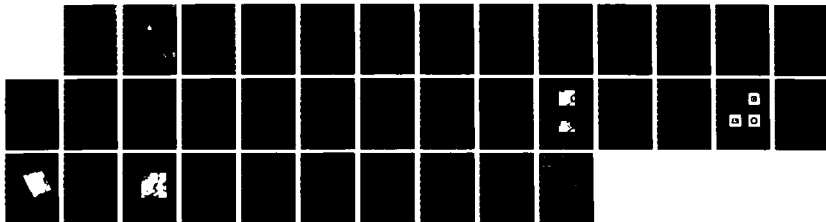DYNAMIC PRESENTATION OF LONG TERM UPPER OCEAN STUDY
(LOTUS) DATA USING VIDEOTAPE(U) WOODS HOLE
OCEANOGRAPHIC INSTITUTION MA E T MONTGOMERY SEP 86

MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS-1963-A

WHOI-86-33

Woods Hole Oceanographic Institution

Dynamic Presentation of Long Term Upper Ocean Study (LOTUS) Data Using Videotape

by

Ellyn T. Montgomery

September 1986

Technical Report

DTIC
SELECTE
DEC 3 0 1986
E

86 12 30 204

2

WHOI-86-33

Dynamic Presentation of
Long Term Upper Ocean Study (LOTUS) Data
Using Videotape

by

Ellyn T. Montgomery

Woods Hole Oceanographic Institution
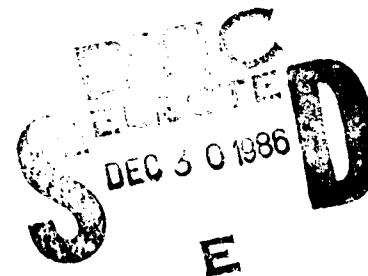Woods Hole, Massachusetts 02543

September 1986

Technical Report

Approved for Distribution:

Robert C Beardsley
Robert C. Beardsley, Chairman
Department of Physical Oceanography

DEC 3 0 1986

ABSTRACT

In order to show efficiently the large amount of data obtained during the Long Term Upper Ocean Study (LOTUS), a new method of data presentation was developed. Three data variables can be included in a simple color contour plot, but if successive color contour plots are recorded on videotape, a fourth variable, time, can also be shown.

This report documents the process of making a videotape presenting scientific data in this way, from raw data to finished videotape. The videotape shows internal wave kinetic energy versus frequency and depth; the time variation of the videotape displays real time variation in the ratio of 14/30 second to one week, or about 1 month of data every 2 seconds.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	

By		
Distribution/		
Availability Codes		
Dist	Avail and/or Special	
A-1		

TABLE OF CONTENTS

LIST OF FIGURES

ACKNOWLEDGEMENTS

INTRODUCTION

The need to consider a dynamic method of data presentation, such as
videotape, was generated by the large data set collected during the Long
Term Upper Ocean Study (LOTUS). LOTUS was a two year experiment (Briscoe
and Weller, 1984), designed to acquire and analyze a continuous set of data,
sampled primarily from the upper ocean, but covering the entire range of
depths. LOTUS took place between May 1982, and May 1984. The mooring
arrays were deployed at 34°N, 70°W (the old Woods Hole Site L), on the Hat-
teras Abyssal Plain. Figures 1a and 1b show the duration and relative posi-
tion of each of the moorings used during the two years of LOTUS.

A listing of all LOTUS-related Woods Hole Oceanographic Institution
technical reports is provided in the Appendix to furnish details about the
experiment that are not described here.

A maximum of two years of current meter data exists for depths between
5 and 4000 meters. Most conventional methods of data presentation would
show the data at each depth separately; the goal in this case was to show
all the data together. Three variables (e.g., kinetic energy versus fre-
quency and depth) can be shown in a two-dimensional color contour plot, but
in order to show the fourth variable, time, some dynamic form of presenta-
tion, such as videotape, must be used.

This report documents the process used to make a videotape presenting
LOTUS data. All stages of the work are included: data selection and manip-
ulation; use of UNIRAS software to create individual plots; and the actual
videotaping of the plots.

LOTUS MOORING DEPLOYMENTS

Figure 1a. The durations of moorings used during LOTUS.

Figure 1b. Locations of each mooring used during LOTUS.
Year 1 mooring array: surface (767, 770 △); near surface (766 O);
intermediate (764, 765 □).
Year 2 mooring array: surface (787, 792 ▲); near surface (788 ●);
intermediate (789, 790 ■).
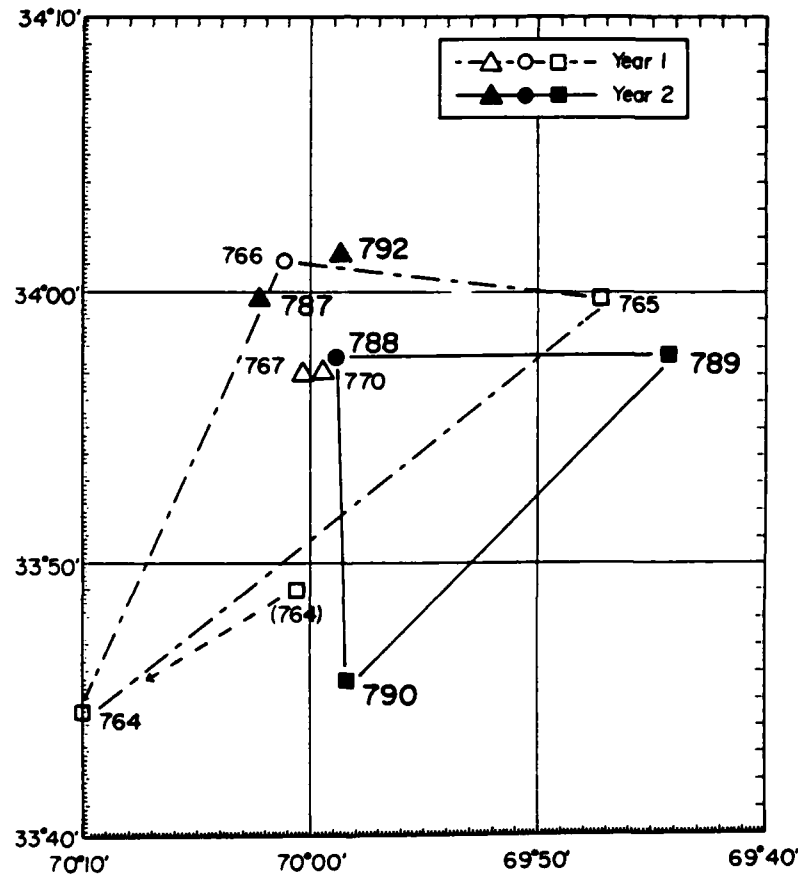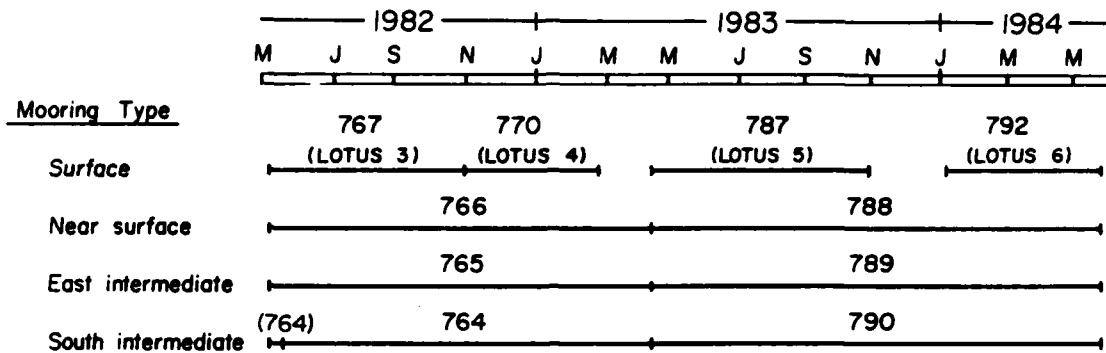
METHODS DISCUSSION

Although a wide variety of possible methods of creating a time display
of horizontal kinetic energy spectral density versus depth and frequency
were available at the outset of this project, it soon became obvious that
many fewer were actually feasible. For example, the animation of the time
display could have been done by computer, but this would have required a
more sophisticated computer graphics system than we have, so the less auto-
mated method of generating individual color contour plots and filming them
sequentially was used. Even with the general method chosen, there were
still many decisions to be made. Several of the options considered are dis-
cussed below.

In order to have the project completed by the deadline of mid-January
1986, the use of in-house equipment and existing software was necessary.
This limitation made videotaping individual plots generated using PROSPECT
(for the spectral analysis) and UNIRAS (for the graphics) the most reason-
able option. The data and software needed were both on one of the Woods
Hole Oceanographic Institution (WHOI) computers, a Digital Equipment Corpor-
ation VAX 11/780, designated the Red VAX, so this system was used to carry
out all of the processing. WHOI has a videotape studio, and display devices
(VCR's) are readily available for general use, so videotape was chosen as
the film medium over 16 mm or film loops. This left only the choice of
which hardcopy device to use.

Three color hardcopy options were available on the Red VAX: slides
from the Matrix QRC camera; paper hardcopy from the Applicon color printer;
and paper hardcopy from the Tektronix 4695 color ink jet printer. Slides
were not used due to anticipated problems with registration of the overlaid
plots during the videotaping. The possibility of using the Applicon was
eliminated due to cost, though it would have produced consistently sized
hardcopies of better quality than the other available hardcopy devices.
Applicon plots cost $40 per page, including magnetic tape mount charges.
Even if six figures were plotted per Applicon page, the cost of making hard-
copies of all of the plots would have been approximately $1400. This left
the Tektronix 4695 as the hardcopy device, which produced good quality color

plots. It is a pinch roller device, though, so the plots did not come out exactly the same size (to the mm), which caused minor problems with overlaying the plots during the videotaping. The cost of making all the hard copies on the Tektronix was less than $400.

Some of the methods considered but not used were: using an image encoder to convert the image generated by the computer directly to videotape; videotaping images from the computer terminal's screen; and using another WHOI computer, the Remote Sensing VAX Processor (RSVP), to do all the processing and using a 16-mm movie camera to film the images.

An image encoder was not available at WHOI at the time, and due to the project deadline, it would have been impossible to get one to use, set it up, test the system, and then make the videotape. Unfortunately, this probably would have been the best way available to transfer computer generated images onto videotape. There is now an encoder at WHOI, so the procedures described herein should be modified to allow its use.

Videotaping directly from the screen was not used because of mediocre image quality on the videotape, individual plot generation time, and the large amount of disk space required to keep enough plots available to make a videotaping session worthwhile. This method would have been a more viable option, if WHOI had available in software a method of bring plots to the monitor rapidly enough in succession to allow 'real time' filming of the series of images displayed on the screen.

The RSVP system's image processing capabilities were attractive, but too much time would have been spent developing a program to produce equivalent contour plots on that system. Also hardcopy was a problem: still photographs were available, but expensive; and the 16 mm camera had no way to control the number of frames shot for each plot, so the time base of the film would be irregular.

All of the above mentioned considerations made using PROSPECT and UNIRAS software on the Red VAX, generating hardcopies of the plots on the Tektronix 4695, and videotaping the individual plots in sequence the best method for completing this project. As computer graphics and videotape technology improve, and become more affordable, there will be other "best methods", but at the time, the method described herein was the best.

COLOR CONTOUR PLOTS AND VIDEOTAPE

The videotape was made from a series of color contour plots, each showing the same depth and frequency ranges over different time periods. Frequency was the x variable, water depth was the y variable, and horizontal kinetic energy spectral density was the z variable; the values of z were contoured. The plots were created using 11 spectra calculated over the same time period, each for a different depth.

Each plot shows 7 days 3 hours of data. This duration was chosen because the inertial and tidal periods (about 21.5 and 12.4 hours respectively) then both fall near spectral frequencies. The start times of all plots are 3 days 13 hours 30 minutes (one half of the total time) later than the start time of the preceding plot. Each plot therefore overlaps by half the preceding and succeeding plots, and every other plot is adjacent in time.

The completed videotape used 206 color contour plots to show the time variation of kinetic energy spectral density for frequencies between .012 and 2 cycles per hour, versus depth. Two years of data are displayed in about 50 seconds of videotape. The plots blend into each other so that trends over time can be observed.

DATA PROCESSING

A) Set up

The first task was examination of the LOTUS data set, to decide which instrument depths should be used for the plots. The data were collected by current meters on surface or subsurface moorings, sampling every 3.75 or 7.5 minutes. All the records were reduced to a common 15 minute time base by vector-averaging 2 or 4 points together; this gave 684 data points in each 1-week time series. The data were stored in Buoy Format data files. Buoy Format is the standard format developed and used at WHOI for storing the large time series that come from current meter moorings. The current meter data reports (Tarbell et al., 1984 and 1985) and the Buoy Group data

processing report (Spencer et al., in preparation) are good sources of further information on Buoy Format and the LOTUS current meter data.

The objective was to select instruments that had at least 50% data return over the two year period and that were representative of the whole depth range. The same depths were used as much as possible throughout, to minimize the number of parameters that had to be changed at each step of the processing. When data from a given depth were unavailable, but data from an adjacent depth were available, the data from the nearby depth were used (i.e., if data from 100 m were missing and the next instrument on any mooring was at 127 m, data from 127 m would then be used instead of from 100 m). Figure 2 shows the overall current meter data return from the centrally located surface and near-surface moorings used in LOTUS. The 4 intermediate moorings used over the two years of LOTUS are not shown, because data were used from them in only one instance, to supply data for the first year at 500 m.

Most of the instruments were at depths less than 500 meters, so to distribute the existing data evenly over the full 4000 meter depth range, a logarithmic Y axis was used. The nominal depths chosen were the following: 15 m, 25 m, 75 m, 100 m, 200 m, 300 m, 500 m, 750 m, 1000 m, 1500 m and 4000 m. Unfortunately, there were no data available for the first year at 2500 m, so this depth was not used in the plots, though it would have improved the depth distribution. Instruments shallower than 100 m were from surface moorings, those deeper than 100 m were from near surface moorings (except for the first year 500 m data, which came from an intermediate mooring), and data from 100 m came primarily from surface moorings, but sometimes from the near surface moorings. Figure 3 shows a schematic of the moorings with instruments at the depths chosen for use in the videotape. The Y axis is log to the base 10 scale, as is the y axis of the contour plots.

B) Start Time Determination

The next step was determination of the start time of each of the planned plots. Since the spectra were to be calculated over 7 day 3 hour intervals and overlapped by one half, the start time for each time series
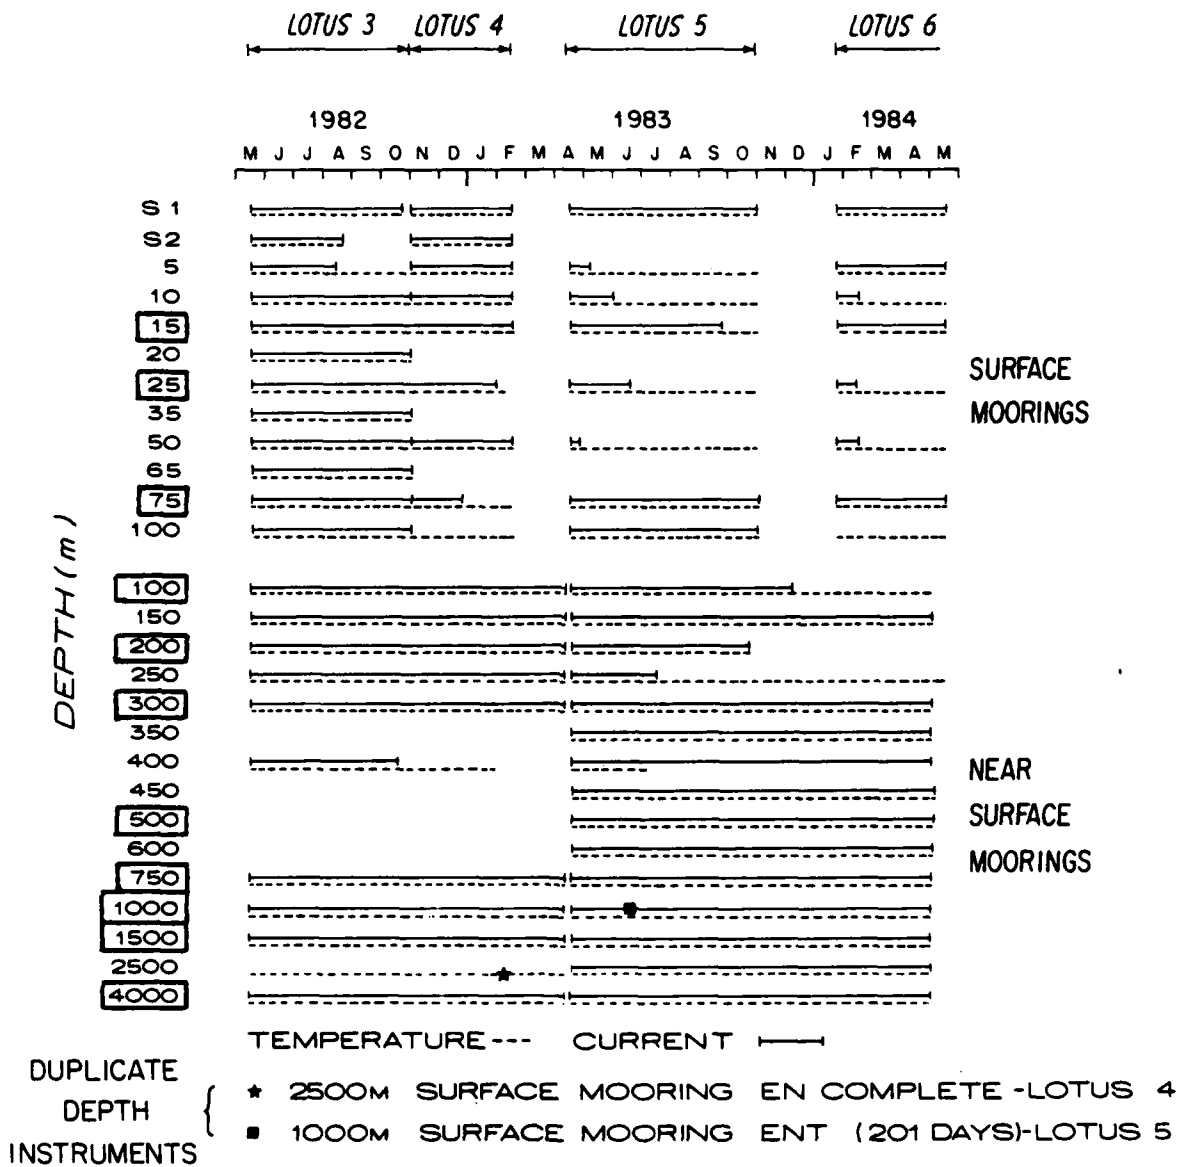
- 12 -

CURRENT & TEMPERATURE

Figure 2. Chart showing current meter data availability during LOTUS. The selected depths are boxed.
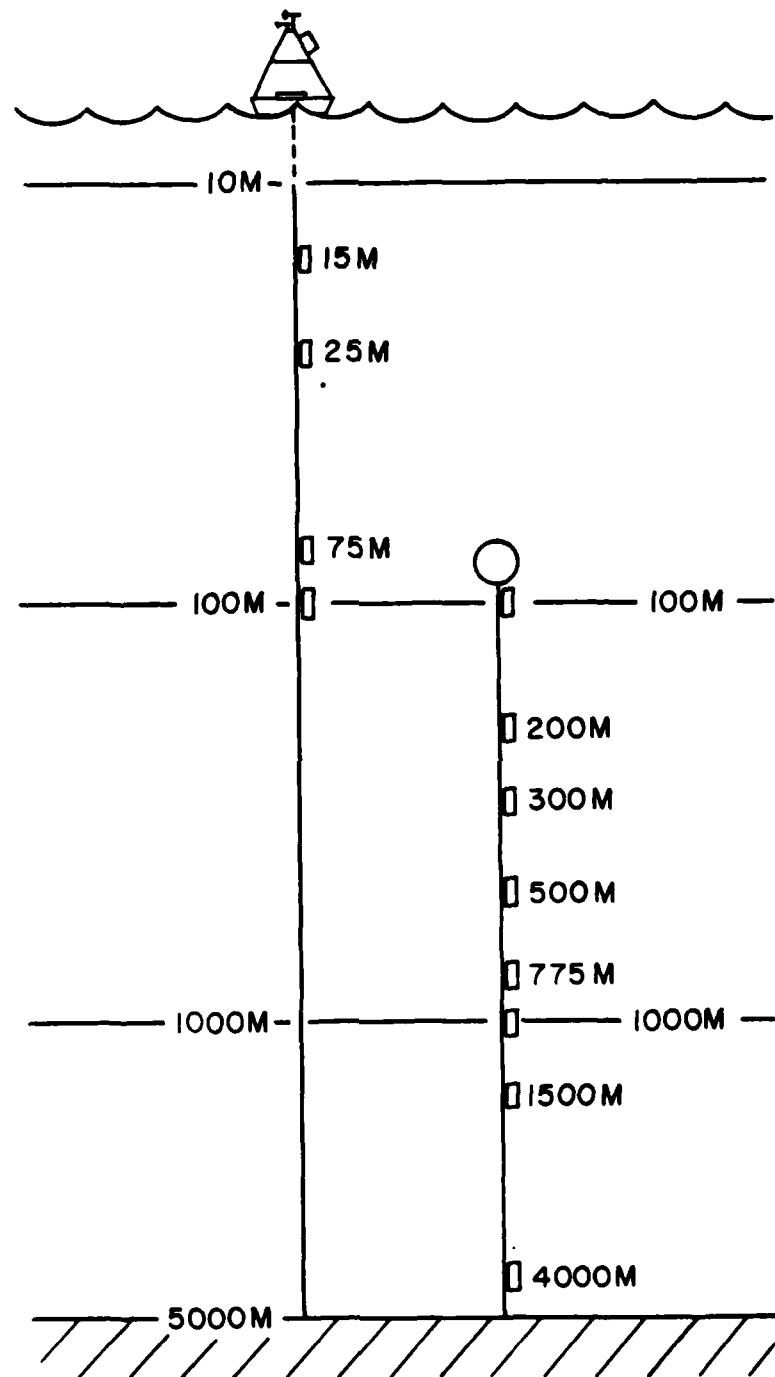
Figure 3. Schematic showing a surface and a near surface mooring typical of those used in LOTUS with instruments at the depths chosen for use in the videotape. Note that depth is presented on a $\log_{10}$ axis to more evenly distribute the data.

had to be obtained. To achieve this end, a short program was written to
take start and stop time of the entire series, the desired delta time and
overlap, and calculate the start times of all the possible plots within the
defined time period. The listing of computed start times became the source
for subsequent processing. Since the data set spanned two years, a total
of 206 plots was needed to present all the data. The start time of the plot
was subsequently put in the lower right hand corner of each plot, so the
time could be more easily identified during the videotape.

C) Spectral Analysis

Spectra of the 15 minute averaged data were computed using PROSPECT
(a WHOI spectral analysis program; Hunt, 1982) for each depth for each 1
week time period. In this case, calculating the auto spectra of the data
allowed the frequency components contributing to the variance of a fluctuat-
ing process to be displayed.

Each 684 point, 1 week time series was broken into 2 adjacent 342
point pieces with a third 342 point piece overlapped 50% with the other two.
The least squares linear trends were removed from each piece, and each piece
was cosine windowed ("Hanning") and normalized by $\sqrt{8/3}$ to account for vari-
ance lost in the windowing. A fast Fourier transformation was then done on
each piece and a raw spectrum calculated. The average spectrum of the 3
pieces was then smoothed. The average spectrum had 171 points (1/2 the num-
ber of points in the piece) which were grouped to reduce their number and
obtain more statistical stability. The grouping was 9 single, 15 with 5
averaged together, and 8 with 10 averaged together; the last 7 points were
discarded.

Each smoothed, averaged spectrum therefore had 32 points (9 + 15 + 8).
The periods represented were between 85.5 and .536 hours.

The output of the PROSPECT routine SPECACR comes as an unformatted
ASCII file for subsequent plotting, and as a formatted file for listing.
The formatted file was used as the data source for subsequent processing,
and will be referred to as the A*.DAT file (* = instrument ID and code).

All the depths for a given time interval were processed together, and
were assigned a two letter identifying code, starting at "NA", and ending

- 15 -

at "VS". The codes were necessary to simplify retrieval of the data files for specific plots. For instance, all 11 A*.DAT files for start time 06/18/82 had the code NJ, so these files were quickly accessible as A*NJ.DAT (* = instrument ID only here).

Because of the large number of spectral computations to be completed (11 depths x 206 start times = 2266 smoothed, averaged spectra), command files were used to control the processing. These command files passed variables to the command file that ran PROSPECT, and allowed many runs to be done together in one overnight batch job. Usually 10-20 of the time periods were done in one night. The command files were large and cumbersome to edit, but were worth the effort in run time saved.

D) Array Manipulation

The A*.DAT files for each time period had to be combined to create one file for input to UNIRAS (the graphics software package used to generate the plots). Along with reading 11 A*.DAT files and writing one output file, several other modifications had to be made to allow the plots to be created. The following steps were repeated 11 times (once for each depth) for each 7 day 3 hour time series, to obtain the needed data for one color contour plot.

The squared values of the East and North components of the spectra (columns 1 and 2, labeled A1 and A2 respectively) and the accompanying period (last column) were read from the A*.DAT file. East and North were used to calculate the Horizontal Kinetic Energy spectral density (HKE). The units of HKE spectra are (erg/gm) / (cycle per hour), or $cm^2 s^2$/(cycle per hour). The Horizontal Kinetic Energy spectral density varies from approximately 0 to 30 (erg/gm) / cycle per 85.5 hours, so the logarithm to the base 10 of Horizontal Kinetic Energy spectral density was calculated to distribute the data evenly among the contour levels. The log_{10} transformed Horizontal Kinetic Energy spectral density was called LH and used as the Z variable in the plots.

$$LH = log_{10} [(A1 + A2)/2]$$

Period was used as the X variable, and was log transformed to make the spacing as it would have been if frequency were plotted in the usual way for spectra. Since the maximum and minimum values of period were 85.5 hours and 0.536 hours, the $\log_{10}$ values were 1.932 and -0.2708, respectively. For ease in the plotting stage, one was added to the $\log_{10}$ value to make both the axis maximum and minimum positive.

The convention of displaying the auto spectra of current meter data with frequency plotted on a log X axis, with the lowest value at the left and the highest value at the right, was followed in these plots. Instead of converting periods to frequency every time, period was plotted, but the axis was labeled with the equivalent frequency. For example, 85.5 hours corresponds to a frequency of 0.0117 cycles per hour, so $1 + \log_{10}(85.5)$ was assigned to X minimum, and $1 + \log_{10}(0.536)$ was assigned to X maximum. Details of the tick mark calculation process will be described in Part C of the UNIRAS processing section.

The value of depth for each spectrum was input by the user. In order not to have all the data bunched at the surface, as it would appear on a linear scale plot, the log of the value of depth was used. Also, so that the plot resembled the "real" ocean, 15 meters became the top Y axis value, and 4000 meters became the bottom. This organization required that the value of Y maximum be 15 m, and Y minimum be 4000 m. UNIRAS sometimes incorrectly dimensions the plots, if the assigned value for the axis maximum is not actually greater than the value assigned to the minimum. To avoid this problem, the log to the base ten of the depth was multiplied by -1, so 15 m became -1.1761, and 4000 m became -3.6021, and thus, the value of Y maximum was made greater than the value of Y minimum.

The data arrays after processing had 352 points, 32 for each of 11 depths. The first 32 points were the 15 meter spectrum, modified as described above, the next 32 were the modified 25 meter spectrum, followed by subsequent depths till the end of the file. The X and Y arrays were the same from one plot file to the next, with the changes occurring in the Z values (except when a substitute depth was used in place of the original depth). A missing data depth was treated by inserting values of 99.9999 into the Z array for each of the 32 periods for the depth. Values of depth

and period were processed in the usual manner, so the output data files always had the same number of points. For instance, if 15 m data were missing, the first 32 values of Z would be 99.9999, the first 32 values of Y (depth) would be -1.1761 $\left(-\log_{10}(15)\right)$, and the first 32 values of X (period) would be those read from the A*.DAT file; thus the number of points is not changed by missing data.

The files resulting from these manipulations were named EN*AR.DAT (* = start date of time series analyzed), and were used as the input files for UNIRAS. The format used was: Z, X, Y, (1X,F10.4,2X,F6.4,2X,F6.4), but as long as the format from the processing is the same as the format read by the plot generation program, it does not matter specifically what the format is.

UNIRAS PROCESSING

UNIRAS is a versatile raster-based software package that has good color contouring capabilities. It consists of a library of Fortran callable subroutines that do virtually everything from simple vector drawing to three-dimensional plot rotations. The UNIRAS Raspac and Geopac software contain all the routines needed to make color contour plots. The images generated by UNIRAS are stored in plot-deferred files called UNIWORK.DAT and UNIINFO.DAT. These plot files can be displayed or hard-copied on the device selected in the program. A Tektronix 4107 terminal and 4695 color ink jet printer were used for this project. Both devices functioned well, except for the problems inherent to ink jet printers, namely jet clogging.

The program created to generate each of the 206 different color contour plots can be separated into 5 main parts: parameter setting, missing data handling, axis drawing, reading data arrays, and data interpolation and contouring. Command files were again used to pass parameters to the program, control the file assignments and runs, and rename the output files for identification.

A new version of UNIRAS was released in the time between the completion of the videotape and the publication of this report. The videotape

was completed using the old version (84.1), therefore the processes de-
scribed herein are for the old version. Many of the subroutines are the
same, but information given here will not necessarily function in the new
version as it did in the old version. The following discussion of UNIRAS
processing is intended only to document how plots were created for use in
the videotape, not to serve as a guide to using UNIRAS subroutines. For
information on UNIRAS, the reader is referred to the UNIRAS Raspac and
Geopac guides (European Software Contractors).

A) Parameter Setting

Most of the routines used in generating UNIRAS plots require some of
the following parameters to be supplied to the program: array names, scal-
ing factors, maximum and minimum values of axes, axis lengths, number of
grid units, line widths, and text fonts. Though these parameters could be
written into the program, in this application they were assigned to varia-
bles. The default values of the variables were those for the case when all
data depths were present. The default values were assigned to the variables
in data statements, and were modified when any data depth was determined to
be missing. Some of the default values used were the following: X axis
length = 100 mm, Y axis length = 100 mm, grid onto which data points were
placed = 16x24 (16 grids in the X direction and 24 grids in the Y direc-
tion), and number of points = 352.

Colors for the contours were also defined using variables. A default
color scheme was available, but the separation between adjacent colors was
not enough to allow the reds and oranges to be distinguished once the plot
was filmed. There are 256 colors available concurrently in UNIRAS, so
plenty of shades were available to choose from. Percentages of cyan, ma-
genta, and yellow were chosen to define each color, and then the colors were
assigned to the given contour levels. The printer had to be used instead
of the terminal for the color testing because it could print the defined
colors, and the terminal could not. Each contour level in these plots rep-
resents a factor of 3 change in the value of z. The color assigned to the
lowest level is very dark blue and is used for values less than 0.00316
(erg/gm)/cph. The color assigned to the highest level, for values greater

than 31.6 (erg/gm)/cph is bright yellow. The green-red boundary occurs at 0.316 (erg/gm)/cph.

B) Treatment Of Missing Values

In cases of one or more sporadically missing data depths, part of the plot representing the missing data had to be blanked out. The program could find which data depths were missing by checking for 99.9999's in the Z values, or by interactive input of availability of data at Y meters. Once the missing depths were established, the default values were changed to modify the plot size accordingly.

If the contouring routine was called over the whole area, including the 99.9999's indicating missing data, artificial, steep contour gradients were created as a result of the 99's being adjacent to real data values of a much lower magnitude. To avoid this problem, the contouring routine was only used on areas of real data. When there was a data depth missing, the Y length of the plot was reduced so that it agreed exactly with the extent of data coverage. Effectively, one or two subplots with depth ranges of less than the default 15-4000 m (eg., 100-4000 m) were made within the axes designed to contain all data depths. Since the smaller plot(s) could not entirely fill the area, the missing data were represented by the band of white paper with no printing on it left inside the axes.

If the surface depths were missing sequentially, (15 meters; 15 and 25 meters; 15, 25, and 75 meters; or 15, 25, 75 and 100 meters) the only parameters that needed modification were the axis lengths, upper limits, and number of grid units. For instance, if data from 15 and 25 meters were missing, the next available data depth was 75 meters, so the plot was drawn using 75 meters as Y maximum instead of 15 meters, and the Y length and number c grids in the Y direction were decreased proportionally.

When data were missing from a depth between two depths with data, the situation was a little more complicated. The two areas of existing data had to be treated completely separately, as two subplots. When no 25 m data were available, a subplot showing the 15 meter data band had to be made, as well as a subplot showing the 75 to 4000 meter data. Therefore, when missing data depths existed, in most cases the whole area between adjacent

depths with data was blanked out. When a subplot with just 15 m data had
to be made, a width of 15-18 m was chosen to allow this data to be visible
(a line representing the 15 m data would be useless). This slight expansion
of depth coverage was also used when 75 m was missing, the lower boundary
of the top subplot was at 30 m not 25 m. The procedure for making subplots
was essentially the same as for making one plot, except both the minimum
and the maximum values of Y had to be changed, and two subplots were made
to fit within the axes each time, instead of one. Figures 4a and b compare
the parameters needed to make a plot with all depths present and the param-
eters that are needed when a data depth is missing from the middle of the
plot.

C) Axis Drawing

UNIRAS has several automatic axis drawing and labeling routines, but
none worked in this application having two logarithmic axes. The axes of
the plots therefore were created using simple vector drawing routines. The
axes were the same for all plots generated for the videotape, and served to
frame the plots and subplots.

Use of the vectors entailed doing the calculations to determine where
to put the tick marks. Linear interpolation was the method used to deter-
mine the tick positions on the axes. The total length of an axis (in mm)
was known, as was the range of values it represented (-3.6021 to -1.1761
for the Y axis, depth), and the desired value of each tick mark. For exam-
ple, to determine where to put the 1000 m tick on a 100 mm Y axis going
from 15 to 4000 m (-1.761 to -3.6021), this equation could be used:

$$\left[\frac{(-3.6021) - (-\log_{10}(1000))}{(-3.6021) - (-1.1761)} \right] 100 = 24.79 \text{ mm}.$$

So the 1000 m tick mark would be placed 24.79 mm above the plot origin.

For the X axis (frequency), the standard log scale intervals were
chosen: .02, .05, .1, .2, .5, 1.0 and 2.0 cph. The corresponding period
of each was calculated and log transformed (remember, the data were in terms
of period not frequency), then linear interpolations were done as described
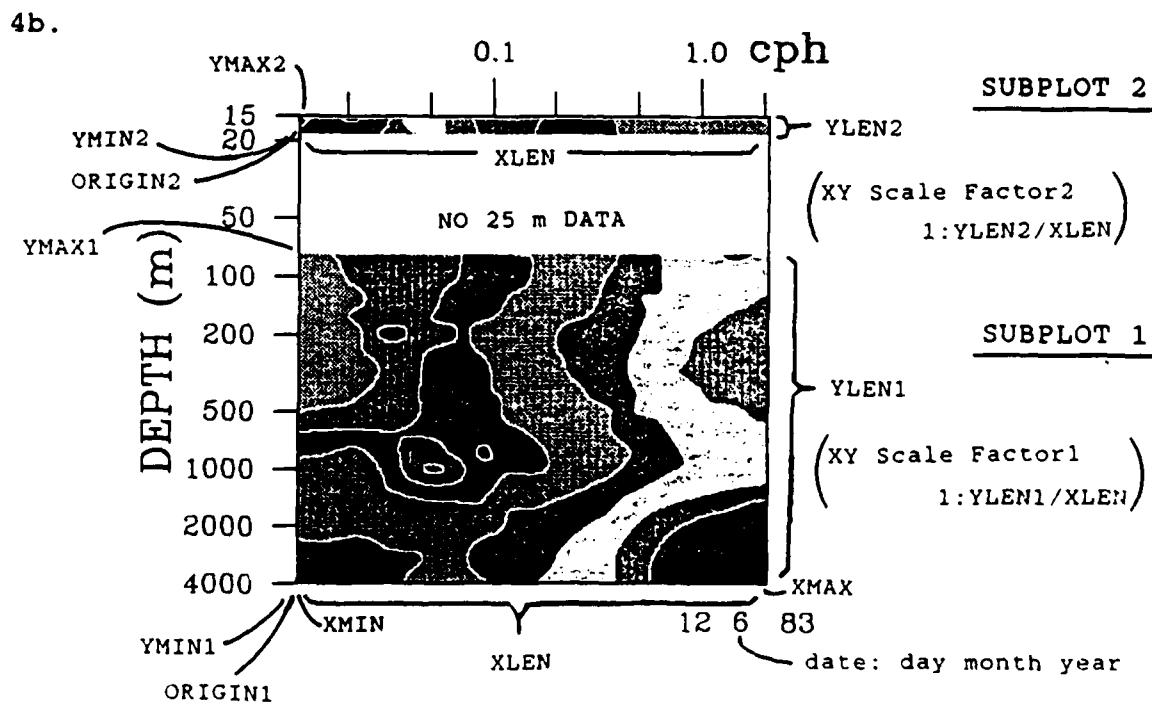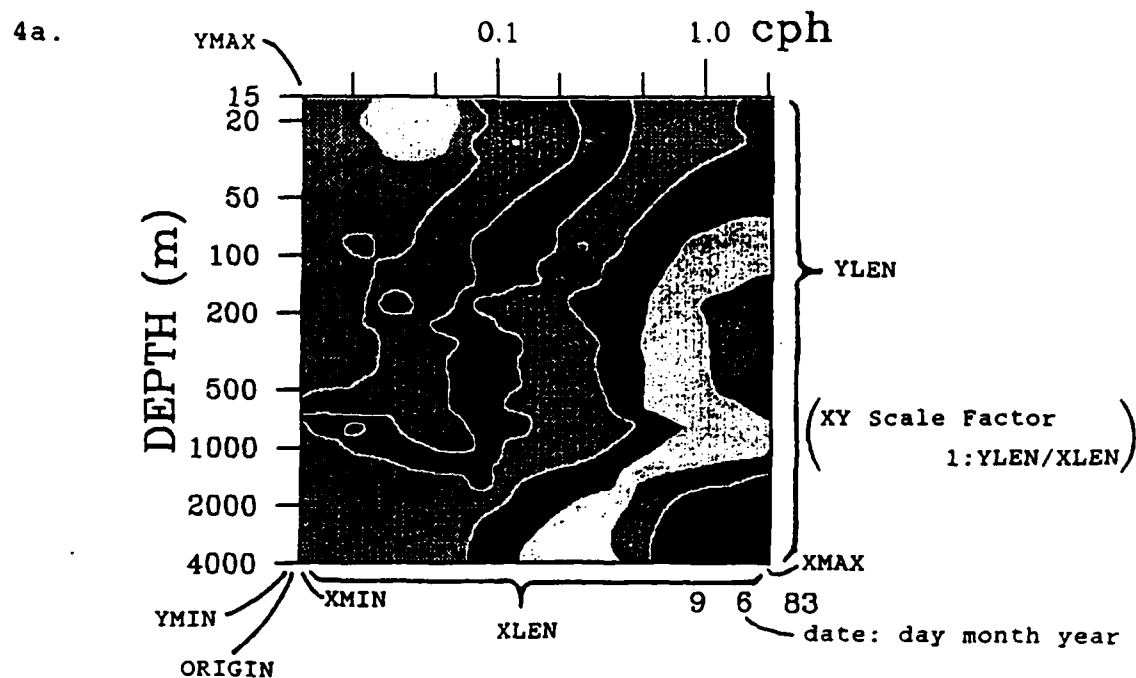above to determine the tick positions on the X axis.

Figure 4. Examples showing the parameters needed to make a plot (a) when all depths are present, and (b) when 25 m data are missing.

When all the desired tick mark locations had been calculated, the values were put into the vector-drawing routines, and the axes drawn. The text used for labels was entered, and positioned using the tick mark locations as reference.

D) Reading Data

As long as the format of the data arrays agreed with the format read by the UNIRAS program, no problems were encountered. Some care was taken to insure that the data were actually put were expected, but otherwise, this process was quite simple. The only complication occurred when doing two subplots for the case of data missing from an intermediate depth; the array counters had to be reset when the second part of the data was read.

E) Data Interpolation and Contouring

The input data arrays were two-dimensional (11x32) and were irregularly spaced due to the $\log_{10}$ transformations. For the UNIRAS contouring routine to work, the data had to be evenly spaced so that a regular matrix could be formed. The simplest UNIRAS interpolation routine, GINTP1, was used to create regular data arrays from the irregularly spaced data. GINTP1 used a combination of linear, quadratic, and distance weighting methods of interpolation. No additional smoothing was done during the interpolation process.

The contouring routine, GCONR2, used a regular matrix, of size X grid, Y grid (see Parameter Setting), to fit a smooth surface to the points. To do this, it averaged the values in each box created by the grid lines, and used the values of adjacent grid boxes to calculate the values for empty boxes. A more detailed explanation of how GINTP1 and GCONR2 work can be found in the UNIRAS Geopac Interpolation Users' Guide (European Software Contractors).

The interpolation and contouring subroutines used to create the plots were both changed in the new version of UNIRAS. GCONR2 was replaced by GCONR2S, and the new Geopac Interpolation manual is called the GEOINT manual. The changes made improve the quality of the contour plot, but do not alter the basic shapes drastically.

An example of the basic plot resolution is shown in Figures 5a, b, c and d. Figure 5a shows a segment of a regularly spaced data array. All the points had the same value, except one point near the left side was 3 times greater than the rest, which for this example corresponded to 8 color contour levels. The effect of contouring using an even number of grids in the X and Y directions (20x20) is shown in Figure 5b. The symmetric nature of contouring over equal X and Y grids is obvious, especially compared to Figure 5c, which shows the same data contoured using the 16x24 matrix actually used for the videotape plots. Figure 5d shows the same data treatment as Figure 5b, but was created using the new version of UNIRAS. This is obviously a better contouring routine, but it was not available when the videotape was made.

In all cases, the effect of one point different from the surrounding ones was fairly large. If the number of grids in each direction was doubled, the size of the area affected by the "odd" point would be smaller, but there would also be more "empty" grid boxes between points, which with irregular data is undesirable. In choosing grid size, a balance had to be achieved between high resolution, with many grid boxes, most of which were empty, and lower resolution, with fewer empty grid boxes.

The irregularly spaced input data points for the two year average plot, represented by dots of the appropriate color class for their magnitude, and the regular grid over which they were contoured (16x24), are shown in Figure 6. The X and Y arrays of the input data points were the same in all plots, and only the magnitude of Z varied, except in cases where a nearby data depth was substituted for the original, then the Y arrays were also different. The logarithmic distribution is obvious in this presentation. Figure 6 also shows how the logarithmic scale allowed depth coverage to be fairly complete for this data, and how the 16x24 grid matrix fits the data, as described in the previous paragraph. The depth distribution of data would have been better if there were enough data at 50 and 2500 meters to use.

An intermediate stage of the process that was not plotted for the videotape, but that shows how the individual spectra become contoured, is presented in Figure 7. The darkened lines represent the depths at which spec-
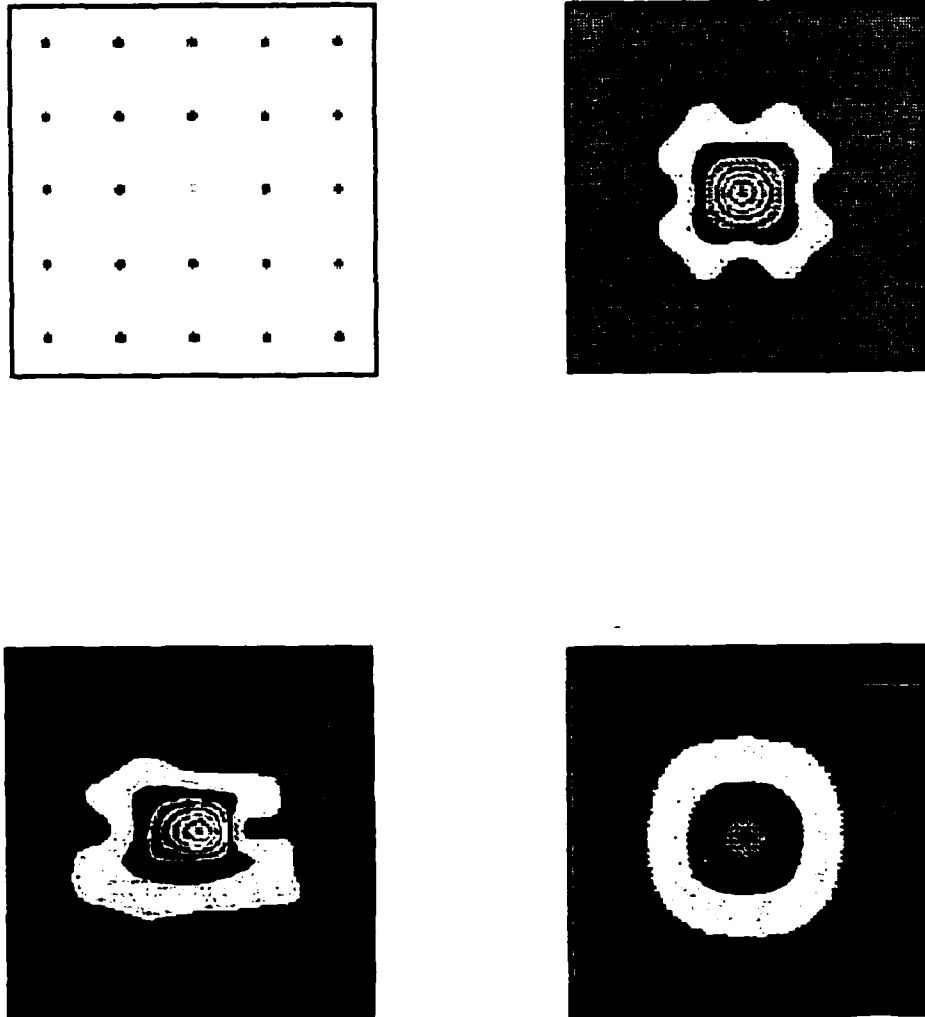
Figure 5a. Dot plot showing regularly spaced data points to be contoured.
      b. The points in Figure 5a, contoured using GCONR2, with a 20x20 grid (even X and Y values).
      c. The points in Figure 5a, contoured using GCONR2, with the 16x24 grid used in the plots for the videotape.
      d. The points in Figure 5a, contoured using the new version of GCONR2S with a 20x20 grid.

<image_rewithnone

- 25 -

Figure 6. Input data points (for 2-year average) with color representing
the magnitude of 2 and the grid onto which they were interpolated.

Figure 7. Contoured surface plot, showing how spectra from each of the 11
data depths were oriented with respect to the rest of the plot.

tra were calculated. The amplitudes of the spectra are shown, with colors
used to represent the defined contour levels. The last step in creating a
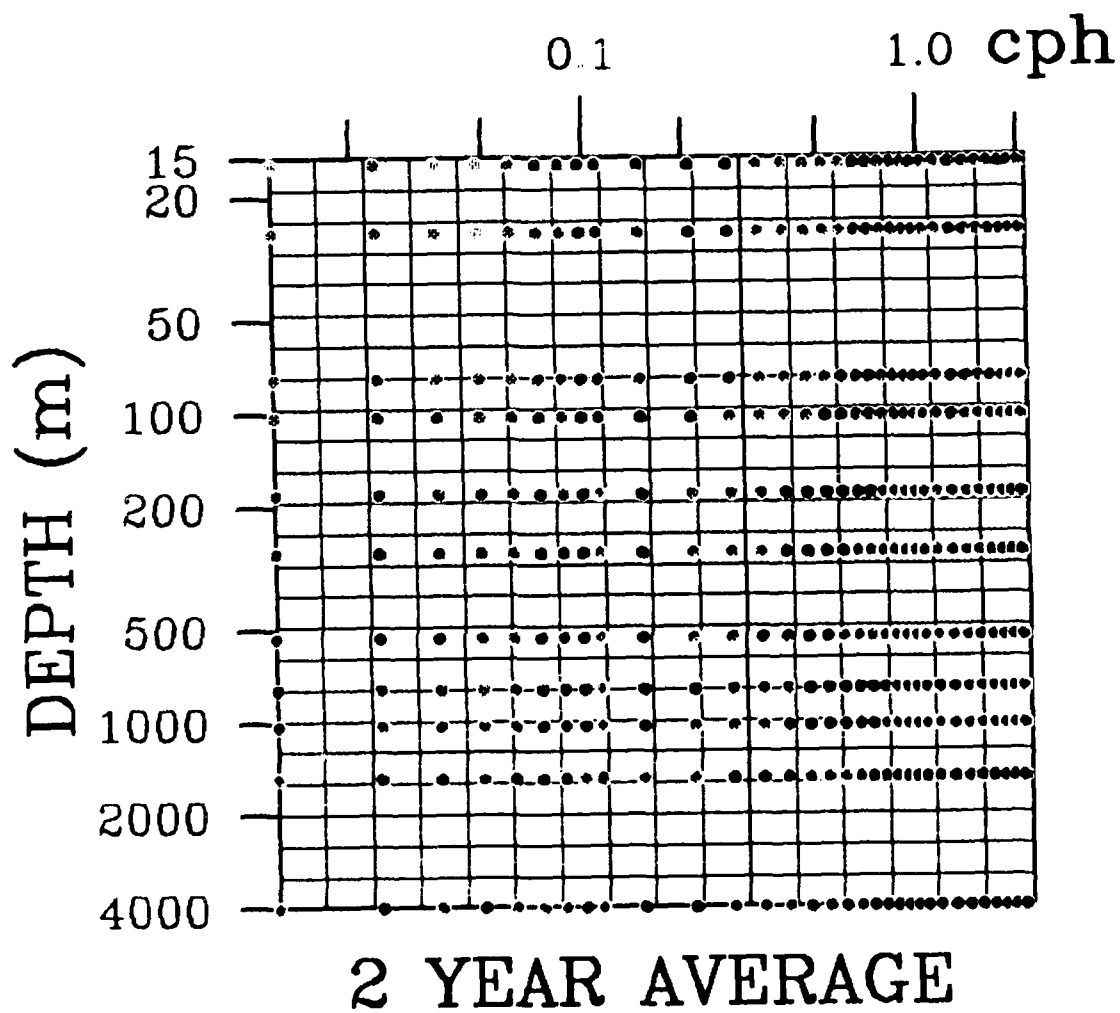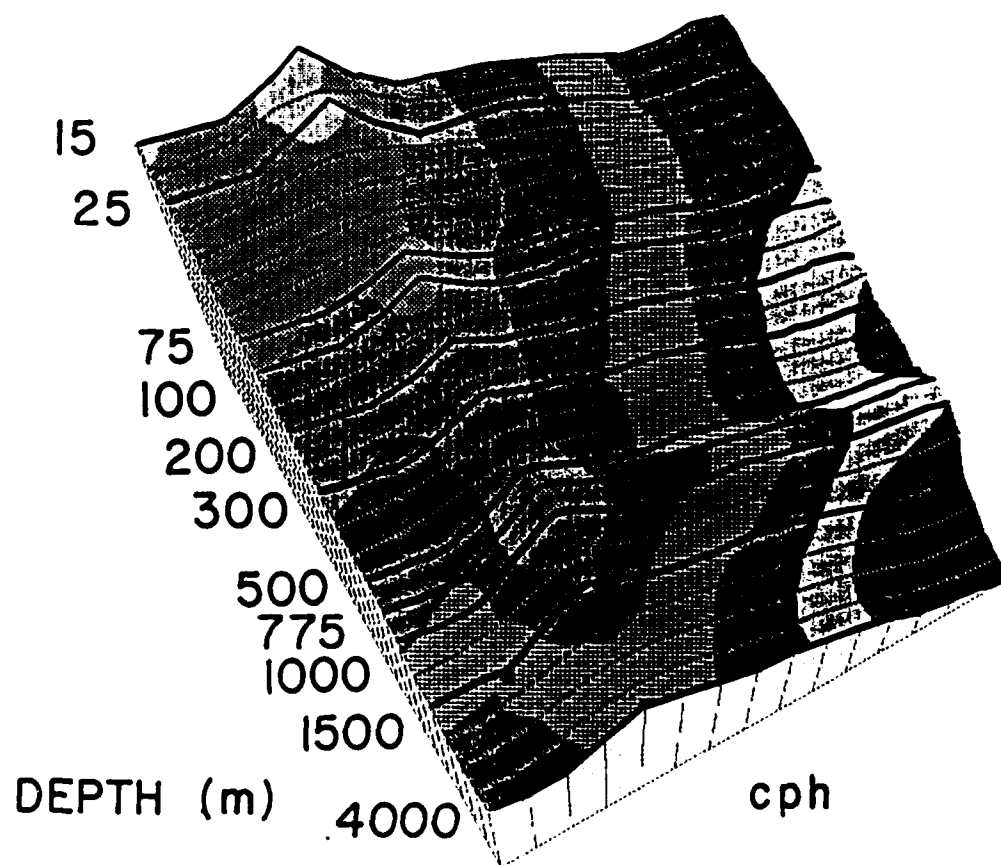two-dimensional color contour plot was mapping the surface plot (Figure 7)
onto a base page. The final result used in the videotape is shown in Fig-
ure 8. The data represented here are the two year averaged spectra from
each of the standard 11 depths, after interpolation, contouring, and axis
tick and label addition.

VIDEOTAPING

The process of videotaping was commenced when hardcopies of the 206
plots were completed. The master copy was made on 3/4 inch videotape, using
the studio and equipment available at WHOI. The camera was fixed looking
downward with the lens parallel to a horizontal surface on which the plots
were placed, and not moved until the whole process was completed. Three
flood lights were placed around the surface to light the plots.

The rate of 4 plots per second displayed on a videotape seemed to be
approximately the rate that would allow the viewer to just differentiate
between the plots, while seeing primarily the flow of one plot to the next.
The videotape apparatus works at 30 frames per second, so an initial test
was done filming each plot for 7 frames. A series of 15 plots was filmed
for this test, to check the actual appearance of a videotape shot at this
speed. Getting the speed right was important because it was not a trivial
thing to change the speed of a completed videotape with the equipment at
WHOI. The rate of 7 frames per plot looked fine in the test, so that speed
was used for the rest of the filming. After seeing the completed videotape,
7 frames per plot seemed a little too fast, so a slightly slower speed would
have been preferable to use (10-12 frames per plot).

The first plot was centered in the videotape frame, and a non-reflec-
tive glass sheet was placed over it to decrease glare from the lights. This
plot was filmed and stored in system memory, then projected onto a color
monitor and used as a reference for registration of subsequent plots. Using
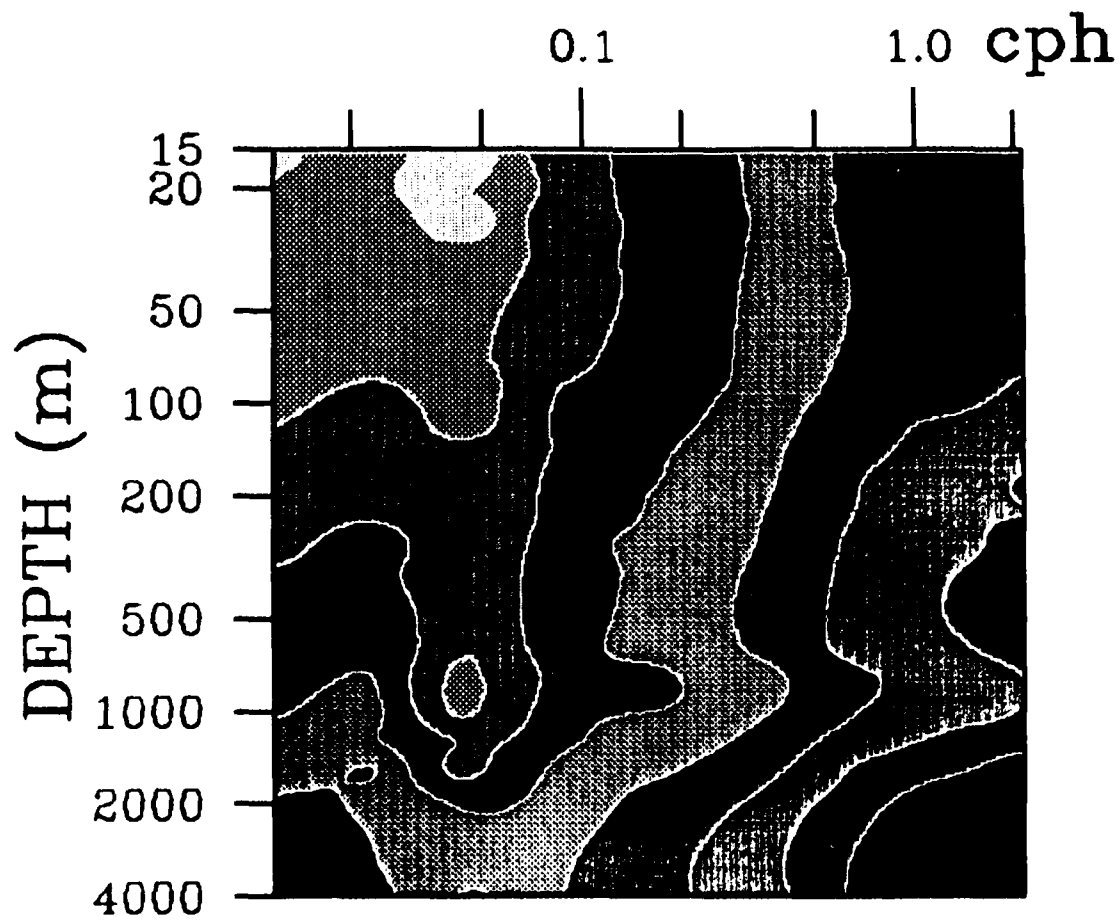the mixer and the monitor, the plot with the next start time was placed

Figure 8. Color contour plot showing horizontal kinetic energy spectral density averaged over two years, versus depth. Each contour level corresponds to a factor of three in energy; the green-red boundary occurs at 0.316 (erg/gm)/cph.

under the glass sheet and positioned to exactly overlay the original plot. After it was positioned, the second plot was filmed, and then the next plot was positioned and filmed, and so on until all the plots were on videotape.

It took two days to film the 206 plots. Much of the second morning was taken trying to exactly match the shade of white that was the previous day's background color. The colors recorded on the videotape shifted over time, so optimally all filming should be done in one session, unless very advanced videotape equipment is available.

The title pages were edited into the beginning of the videotape after the complete time series was filmed. Adding to either end of the videotape was much easier than replacing a missed or bad plot in the middle. The editing apparatus used for this project was not good at inserting frames at exact locations. Fortunately, new editing equipment has been obtained, so many of the problems encountered during this project should not occur in the future.

An audio track, with the months read aloud to denote the passage of time, was added to the videotape last. The source was changed from camera to microphone, and as the videotape was displayed on a monitor, the months were recited into the microphone.

SUMMARY

A videotape was made of current meter data collected during LOTUS.
206 color contour plots generated by PROSPECT and UNIRAS were filmed sequen-
tially to show the variation of kinetic energy spectra over depth and time.

The processing began with examination of the data set to choose the
best instruments to present the most complete data. Eleven depths were used
to represent the entire water column. Start times 3 days 13 hours 30 mi-
nutes apart were calculated for the time between May 1982 and May 1984, when
LOTUS data were available. Spectra were then computed for each start time,
over a 7 day 3 hour period, for each of the data depths available for that
time. The 11 A*.DAT files were used to create one EN*AR.DAT file for each
time period, which was used as input to the UNIRAS plotting program. Color
contour plots were made for each time period using UNIRAS Geopac software,
and plotted using a Tektronix 4695. When all the hardcopies were completed,
each one was filmed in temporal order, for 7 frames. After the time series
was filmed, the videotape was edited to add the voice track and the title
frames. With all this completed, the videotape was ready to present. It
was first shown by Melbourne G. Briscoe at the Ocean Sciences meeting of
the American Geophysical Union in New Orleans, on 16 January 1986.

If this project were to be done again, the following changes in this
procedure should be considered:

(a)   use as much data as are available even though the construction of the
        EN*AR.DAT files would be much more complicated;

(b)   use 7 plots to get through a week, that is, overlap 7 one-week plots
        by one day each instead of 2 plots by half a week; this would give
        much more smoothness and time resolution in the final videotape but
        would require 700 plots instead of just 200;

(c)   contour to a regular grid (e.g., 20x20 instead of 16x24);

(d)   slow the display from 14/30 second per week to perhaps 20/30 - 1 sec-
        ond per week;

(e)   use a computer system that can display color contour plots sequen-
        tially in real time, and use a video encoder. With this equipment,
        hard copies of the plots would be unnecessary, and filming would be
        much easier.

REFERENCES

Briscoe, M. G., and R. A. Weller, 1984. Preliminary results from the Long Term Upper Ocean Study (LOTUS). <u>Dynamics of Atmospheres and Oceans</u>, <u>8</u>, 243-265.

European Software Contractors, 1983. UNIRAS (version 84-2) Geopak User's Guide. UNIRAS, Inc., 50 Mall Road, Suite 212, Burlington, Massachusetts, 01803; 350 p.

European Software Contractors, 1983. UNIRAS (version 84-2) Geopak Interpolation User's Guide. UNIRAS, Inc., 50 Mall Road, Suite 212, Burlington, Massachusetts, 01803; 143 p.

Hunt, M. M., 1982. PROSPECT: A software package for spectral analysis. Information Processing Center, Woods Hole Oceanographic Institution; 89 p.

Spencer, A., S. A. Tarbell, and E. T. Montgomery. The Buoy Group data processing system. <u>Woods Hole Oceanographic Institution Technical Report</u>, in preparation.

Tarbell, S. A., N. J. Pennington, and M. G. Briscoe, 1984. A compilation of moored current meter and wind recorder data, Volume XXXV, Long-Term Upper Ocean Study (LOTUS) (Moorings 764, 765, 766, 767, 770) May 1982-April 1983. <u>Woods Hole Oceanographic Institution Technical Report WHOI-84-36</u>, 154 p.

Tarbell, S. A., E. T. Montgomery, and M. G. Briscoe, 1985. A compilation of moored current meter and wind recorder data, Volume XXXVIII, Long-Term Upper Ocean Study (LOTUS) (Moorings 787, 788, 789, 790, 792) April 1983-May 1984. <u>Woods Hole Oceanographic Institution Technical Report WHOI-85-39</u>, 162 p.

APPENDIX: LOTUS-related WHOI Technical Reports

Title	WHOI No.	Date
Long-Term Upper Ocean Study (LOTUS): A Summary of the Historical Data and Engineering Test Data.	82-53	Dec 82
The Long-Term Upper Ocean Study (LOTUS) Cruise Summary and Hydrographic Data Report, OCEANUS 119 - May 1982.	83-7	Feb 83
The Long-Term Upper Ocean Study (LOTUS) Cruise Summary and Hydrographic Data Report, OCEANUS 129, Oct 1982.	83-29	Aug 83
Long-Term Upper Ocean Study (LOTUS) at 34°N, 70°W Meteorological Sensors, Data, and Heat Fluxes for May-October 1982 (LOTUS-3 and LOTUS-4).	83-32	Sept 83
The Long-Term Upper Ocean Study (LOTUS) Cruise Summary and Hydrographic Data Report, ENDEAVOR 97, April 1983.	83-33	Oct 83
The Long-Term Upper Ocean Study (LOTUS): Cruise Summary and Hydrographic Data Report, OCEANUS 141, November 1983, and OCEANUS 145, January 1984.	84-26	June 84
Compilation of Moored Current Meter and Wind Recorder Data, Volume XXXV, Long-Term Upper Ocean Study (LOTUS) (Moorings 764, 765, 766, 767, 770) May 1982-April 1983.	84-36	Aug 84
The Long-Term Upper Ocean Study (LOTUS): Cruise Summary and Hydrographic Data Report, OCEANUS 154, May 1984.	84-39	Sept 84
Compilation of Moored Current Meter and Wind Recorder Data, Volume XXXVIII, Long-Term Upper Ocean Study (LOTUS) (Moorings 787, 788, 789, 790, 792) April 1983-May 1984.	85-39	Dec 85
Data Tabulations and Analysis of Diurnal Sea Surface Variability Observed at LOTUS.	86-5	Feb 86

DOCUMENT LIBRARY
August 5, 1986

Distribution List for Technical Report Exchange

Institute of Marine Sciences Library
University of Alaska
O'Neill Building
905 Koyukuk Ave., North
Fairbanks, AK

Attn: Stella Sanchez-Wade
Documents Section
Scripps Institution of Oceanography
Library, Mail Code C-075C
La Jolla, CA   92093

Hancock Library of Biology & Oceanography
Alan Hancock Laboratory
University of Southern California
University Park
Los Angeles, CA   90089-0371

Gifts & Exchanges
Library
Bedford Institute of Oceanography
P.O. Box 1006
Dartmouth, NS, B2Y 4A2, CANADA

Office of the International
   Ice Patrol
c/o Coast Guard R & D Center
Avery Point
Groton, CT   06340

Library
Physical Oceanographic Laboratory
Nova University
8000 N. Ocean Drive
Dania, FL   33304

NOAA/EDIS Miami Library Center
4301 Rickenbacker Causeway
Miami, FL   33149

Library
Skidaway Institute of Oceanography
P.O. Box 13687
Savannah, GA   31416

Institute of Geophysics
University of Hawaii
Library Room 252
2525 Correa Road
Honolulu, HI   96822

Library
Chesapeake Bay Institute
4800 Atwell Road
Shady Side, MD   20876

MIT Libraries
Serial Journal Room 14E-210
Cambridge, MA   02139

Director, Ralph M. Parsons Laboratory
Room 48-311
MIT
Cambridge, MA   02139

Marine Resources Information Center
Bldg. E38-320
MIT
Cambridge, MA   02139

Library
Lamont-Doherty Geological Observatory
Colombia University
Palisades, NY   10964

Library
Serials Department
Oregon State University
Corvallis, OR   97331

Pell Marine Science Library
University of Rhode Island
Narragansett Bay Campus
Narragansett, RI   02882

Working Collection
Texas A&M University
Dept. of Oceanography
College Station, TX   77843

Library
Virginia Institute of Marine Science
Gloucester Point, VA   23062

Fisheries-Oceanography Library
151 Oceanography Teaching Bldg.
University of Washington
Seattle, WA   98195

Library
R.S.M.A.S.
University of Miami
4600 Rickenbacker Causeway
Miami, FL   33149

Library
Naval Oceanographic Office
NSTL Station
Bay St. Louis, MA   39522
ATTN: Code 4601

50272-101

REPORT DOCUMENTATION PAGE	1. REPORT NO. WHOI-86-33	2.	3. Recipient's Accession No.
4. Title and Subtitle **Dynamic Presentation of Long Term Ocean Study (LOTUS) Data Using Videotape**			5. Report Date September 1986
			6.
7. Author(s) Ellyn T. Montgomery			8. Performing Organization Rept. No. WHOI-86-33
9. Performing Organization Name and Address Woods Hole Oceanographic Institution Woods Hole, Massachusetts 02543			10. Project/Task/Work Unit No.
			11. Contract(C) or Grant(G) No. (C) N00014-76-C-0197, NR 083-400 (G) N00014-84-C-0134, NR 083-400
12. Sponsoring Organization Name and Address Office of Naval Research Environmental Sciences Directorate Arlington, Va 22217			13. Type of Report & Period Covered Technical
			14.

15. Supplementary Notes

This report should be cited as: Woods Hole Oceanog. Inst. Tech. Rept. WHOI-86-33.

16. Abstract (Limit: 200 words)

In order to show efficiently the large amount of data obtained during the Long Term Upper Ocean Study (LOTUS), a new method of data presentation was developed. Three data variables can be included in a simple color contour plot, but if successive color contour plots are recorded on videotape, a fourth variable, time, can also be shown.

This report documents the process of making a videotape presenting scientific data in this way, from raw data to finished videotape. The videotape shows internal wave kinetic energy versus frequency and depth; the time variation of the videotape displays real time variation in the ratio of 14/30 second to one week, or about 1 month of data very 2 seconds.

17. Document Analysis   a. Descriptors

1. LOTUS
2. moored instruments

b. Identifiers/Open-Ended Terms

1. scientific videotapes
2. dynamic data presentation

c. COSATI Field/Group

18. Availability Statement Approved for publication; distribution unlimited.	19. Security Class (This Report) UNCLASSIFIED	21. No. of Pages 32
	20. Security Class (This Page)	22. Price

(See ANSI-Z39.18)   See Instructions on Reverse   OPTIONAL FORM 272 (4-77)
(Formerly NTIS-35)
Department of Commerce

END

2-81-

DTIC